

GR1 Automatic Swing Gate

For effective access control

Single swing motorised gate equipped with tempered glass and a motorised arm to help control access and customer flow.



Features & Benefits

- Motorised gate operates the tempered glass arm to provide access control and manage customer flow.
- Assists pedestrian access control at guarded passage ways inside and outside (under roofing).
- Bidirectional movement to control pedestrian traffic in both directions.
- The gate arm can be customised with pictograms or signage to aid and inform people. E.g. a red cross indicates no access and a blue arrow indicates the flow of direction.
- Best used when accompanying other electronic systems and turnstiles to further control and benefit customer flow.
- Equipped with arms blocking system.


Applications

- Ideal for use in points of ticket control/access control and passenger traffic, e.g. offices, attractions, leisure & entertainment.

Product Specification

- Gate with housing manufactured from 304 Stainless Steel.
- Toughened glass arm ensures extra durability.
- Power Supply: 24V.
- Power supply voltage: -24VAC.
- Maximum current consumption: 2.5A.
- Maximum power consumption: 60VA.
- Steering signal (configurable): (max. 0.5 sec).
- Feedback signal (configurable): NO/NC.
- Operation temperature: -25° to 50° C (-13° to 122°f).
- Storage temperature: 30° to 60° C (-22° to 140°f).
- IP protection rate: IP33.
- Relative humidity: 10-80%.

Technical Specifications	
Post Height	1008mm
Post Diameter	168mm
Gate Arm Width	708mm

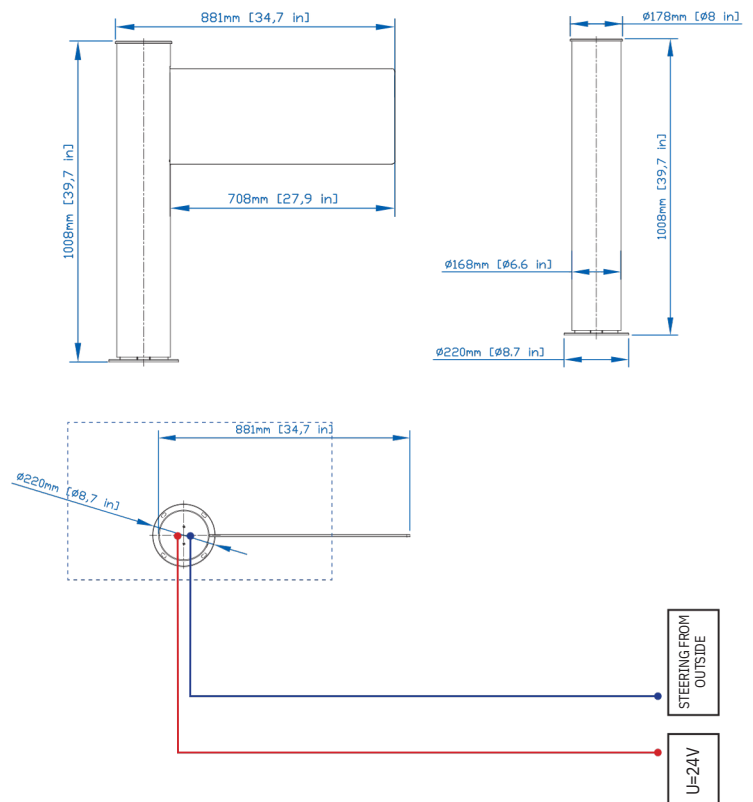

MILTON KEYNES
+44 1908 684 600

NEW YORK
+1-800-441-0019

DUBAI
+971 4 2997 228

PARIS
+33 1 43 09 85 00

FRANKFURT
+49 69 3003 89 010

WROCLAW
+48 71 359 3800

BANGALORE
+91 78925 78956