


SG-2 Speed Gate

For effective access control

Motorised gate that enhances customer flow and security with bidirectional tempered glass arms, sensory arrays, sound alarms and LED pictograms.



Features & Benefits

- Motorised gate operates the tempered glass arm to provide access control and manage customer flow.
- Assists pedestrian access control at guarded passage ways inside and outside (under roofing).
- Bidirectional movement to control pedestrian traffic in both directions
- Features LED pictograms in green or red to show active/inactive traffic directions in the passage.
- Gate remains open in case of a power failure.
- Several glazing and finish options for glass and metal.
- Sensor array and sound alarm work together to enhance security, detecting and alerting users to unusual situations such as two people passing simultaneously or a person passing without authorisation.
- Auto system to slow down the movement of arms approaching full-open/full-closed positions.




Applications

- Ideal for use in points of ticket control/access control and passenger traffic, e.g. offices, attractions, leisure & entertainment.

Product Specification

- Gate with housing manufactured from 304 Stainless Steel.
- Toughened glass arm with 8mm tempered glass.
- Power supply voltage: 24 V DC.
- Current draw at start-up: 4A.
- Maximum power consumption: 90W.
- Wing opening/closing time: - 1 sec.
- Main cabinet material: INOX AISI 304.
- Device wing: Tempered glass 8mm.
- Operation temperature: 0° to 50° C (32° to 122°f).
- Storage temperature: -30° to 60° C (-22° to 140°f).
- IP protection rate: IP 40.
- Maximum operation humidity: 85%.

Technical Specifications	
Gate Height	1013mm
Gate Length	1296mm
Gate Arm Width	650mm

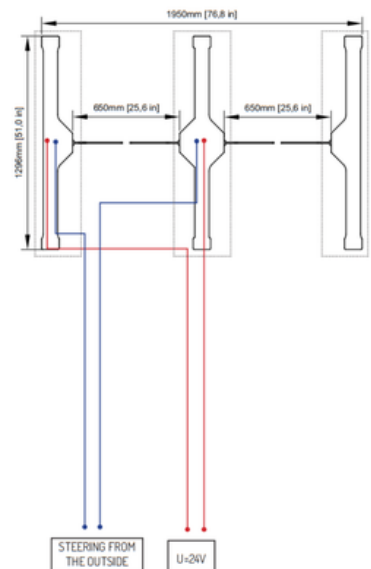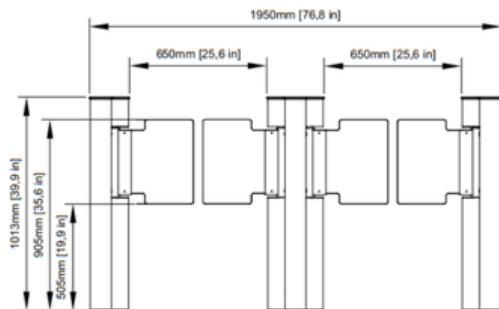

MILTON KEYNES
+44 1908 684 600

NEW YORK
+1-800-441-0019

DUBAI
+971 4 2997 228

PARIS
+33 1 43 09 85 00

FRANKFURT
+49 69 3003 89 010

WROCLAW
+48 71 359 3800

BANGALORE
+91 78925 78956